




DPE109A

IEEE 802.11AC/bgn Wi-Fi with BT Module



802.11AC/bgn+BT miniPCIe, 2T2R

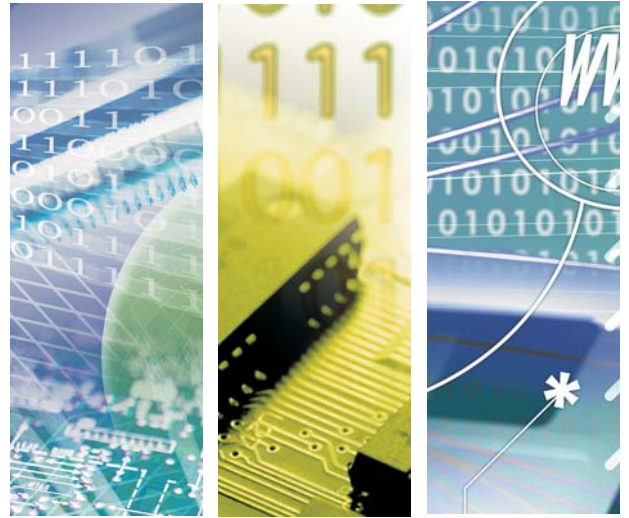

DPE109A

Introduction of Products

DPE109A is an dual band 802.11ac/b/g/n Dual-Band WiFi + Bluetooth miniPCIe. It is a 2T2R (WiFi/BT co-existence supported) technology, with 20/40/80MHz and 256-QAM to maximize bandwidth.

DPE109A lets you move at the speed of life with faster speeds (up to 867 Mbps, 1~3Mbps EDR for Bluetooth), higher capacity, broader coverage and longer battery life. Dramatically reshapes your connected experience.

As usual DPE109A incorporated with advanced security encryption, such as WEP, WPA, WPA2, and 802.1x for secure wireless connection

Product Highlight

- Main Chip:QCA6174A-5
- Bluetooth V4.2, V4.1, V4.0 LE, V3.0+HS, Bluetooth V2.1+EDR system, backward compatible with BT version of 1.1, 1.2 and 2.0
- BT supports Class I (Output power up $\leq +10$ dBm)
- BT transmission speed including 1M, 2M and 3Mbps EDR operations
- Support for Simple Pairing (SP) and Enhanced Inquiry Response (EIR) function
- Support for SCATTERNET and PICONET
- HCI USB interface to work with Windows upper layer stack
- Operates at ISM frequency Band(2.4/5GHz)
- IEEE Standards Support, 802.11a, 802.11b, 802.11g, 802.11n and 802.11ac
- Wi-Fi using Low power PCI Express interface
- Enterprise level security supporting: WPA, WPA2
- Two-stream spatial multiplexing up to 867Mbps data rate

Contact for sales in Europe and Worldwide:

<https://minipci.biz>

Email: martin.hoehne@minipci.biz




Specification

Bluetooth	
Standard	Bluetooth V4.1, V4.0LE, V3.0+HS, V2.1+EDR,
Bus Interface	USB1.1
Data Rate	1 Mbps, 2Mbps and Up to 3Mbps
Modulation Scheme	GFSK, $\pi/4$ -DQPSK and 8-DPSK
Frequency Range	2.402~2.480 GHz
Transmit Output Power	0? Output Power ? +10; Class 1Device
Receiver Sensitivity	< 0.1% BER at -70dBm
Software	BluetoothSuite
WiFi	
Standard	IEEE802.11ac, IEEE802.11a , IEEE802.11b , IEEE 802.11g , IEEE 802.11n
BusInterface	Low Power PCI Express
Data Rate	802.11a: 54, 48, 36, 24, 18, 12, 9, 6 Mbps
	802.11b: 11, 5.5, 2, 1 Mbps
	802.11g: 54, 48, 36, 24, 18, 12, 9, 6 Mbps
	802.11n: MCS 0 to 15 for HT20MHz,
	MCS 0 to 15 for HT40MHz,
	802.11ac: MCS 0 to 8 for HT20MHz
MCS 0 to 9 for HT40MHz	
MCS 0 to 9 for HT80MHz	
Media Access Control	CSMA/CA with ACK
Modulation Techniques	802.11ac: 256QAM, 64QAM, 16QAM, QPSK, BPSK
	802.11a: 64QAM, 16QAM, QPSK, BPSK
	802.11b: CCK, DQPSK, DBPSK
	802.11g: 64QAM, 16QAM, QPSK, BPSK
802.11n: BPSK, QPSK, 16QAM, 64QAM	
Network Architecture	Ad-hoc mode (Peer-to-Peer)
	Infrastructure mode
Security	WEP 64&128bit, WPA, WPA-PSK, WPA2, WPA2-PSK, WPS, IEEE 802.1X, IEEE 802.11i
Electronics characteristics	
Operating Voltage	3.3 V \pm 5% I/O supply voltage
OS Supported	Linux/Win7/Win8/Win10
Antenna Type	U.FL connectors x 2
Operating Temperature	0° ~ +70°C
Storage Temperature	-40° ~ +80°C
Operating Humidity	5%~95%, non-condensing
Storage Humidity	5~95%, non-condensing


Product quick glance



ME Drawing/placement

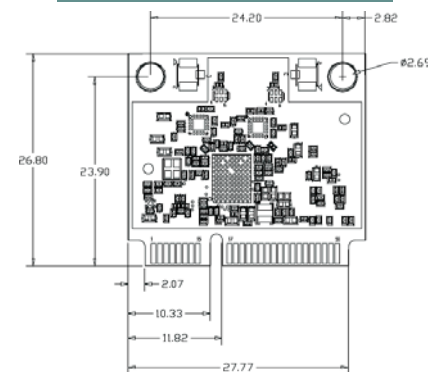

Block Diagram

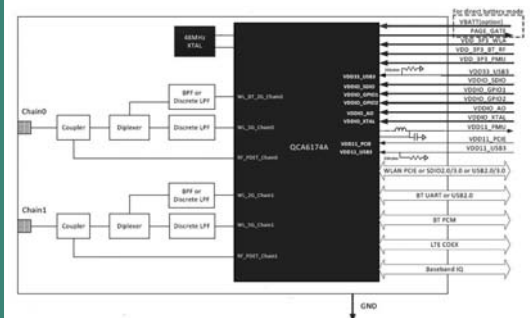

Ordering Information

PART NUMBER	DESCRIPTION
T.DPE109A	DPE109A, Single packed
T.DPE109A-DK	DPE109A-DK, development kit packed
TFGA-DPE109A0-11	Finished non packaing,Bointec,DPE109A

Contact for sales in Europe and Worldwide:

<https://minipci.biz>

Email: martin.hoehne@minipci.biz



We are Your Partner more than Business



TAIJET BOINTEC CO LTD
4F, # 114, ZHOUI ST., NEIHU-TAIPEI 11493, TAIWAN
TEL: +886-2-2759-0081 EMAIL: contact@bointec.com
WWW.BOINTEC.COM

(C)BOINTEC. All rights reserved. Bointec & the Bointec logo are the trademarks of TAIJET Bointec, which may be registered in some jurisdictions. All other brands and product names are registered trademarks of their respective holders. Information supplied by Bointec is believed to be accurate and reliable. Bointec assumes no responsibility for any errors in this brochure. Bointec reserves the right, without notice, to make changed in product design or specifications.

Bointec Authorized Distributer